

## Thermal imaging cameras for industrial applications



Electrical Maintenance

Mechanical Maintenance

Utilities


Energy Loss


## INFRARED: more than meets the eye

## Infrared - part of the electromagnetic spectrum

Our eyes are detectors that are designed to detect visible light (or visible radiation). There are other forms of light (or radiation) that we cannot see. The human eye can only see a very small part of the electromagnetic spectrum. At one end of the spectrum we cannot see ultraviolet light, while at the other end our eyes cannot see infrared. Infrared radiation lies between the visible and microwave portions of the electromagnetic spectrum. The primary source of infrared radiation is heat or thermal radiation.

Any object that has a temperature above absolute zero (-273.15 degrees Celsius or 0 Kelvin) emits radiation in the infrared region. Even objects that we think of as being very cold, such as ice cubes, emit infrared radiation. We experience infrared radiation every day. The heat that we feel from sunlight, a fire or a radiator is all infrared. Although our eyes cannot see it, the nerves in our skin can feel it as heat. The warmer the object, the more infrared radiation it emits.




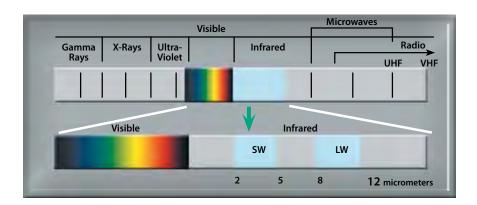

#### The infrared camera

Infrared energy (A) coming from an object is focused by the optics (B) onto an infrared detector (C). The detector sends the information to sensor electronics (D) for image processing. The electronics translate the data coming from the detector into an image (E) that can be viewed in the viewfinder or on a standard video monitor or LCD screen.

Infrared thermography is the art of transforming an infrared image into a radiometric one, which allows temperature values to be read from the image. In order to do this, complex algorithms are incorporated into the thermal imaging camera.

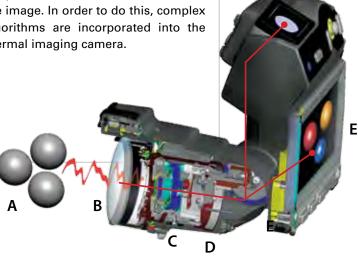

#### Why use thermal imaging cameras?

Why would you choose a FLIR thermal imaging camera? There are other technologies available to help you measure temperatures in a non-contact mode. Infrared thermometers for example.

#### Infrared thermometers vs thermal imaging cameras

Infrared (IR) thermometers are reliable and very useful for single-spot temperature readings, but, for scanning large areas or components, it's easy to miss critical components that may be near failure and need repair.

A FLIR thermal imaging camera can scan entire motors, components, or panels at once never missing any overheating hazards, no matter how small.

#### Use thousands of infrared thermometers at the same time


With an infrared thermometer you are able to measure the temperature at one single spot. FLIR thermal imaging cameras can measure temperatures on the entire image. The FLIR i3 has an image resolution of 60 x 60 pixels. This means that it is equal to using 3,600 IR thermometers at the same time. If we look at the FLIR T640, our top model, which has an image resolution of 640 x 480 pixels, this means 307,200 pixels or using 307,200 infrared thermometers at the same time.



IR thermometer, temperature measurement FLIR i3, temperature in 3,600 spots

#### Find problems faster and easier with extreme accuracy.

It's easy to miss critical problems with a spot IR thermometer. A FLIR thermal imaging camera scans entire components giving you instant diagnostic insights showing the full extent of problems.



#### Thermal imaging cameras for industrial applications

Thermal imaging has evolved into one of the most valuable diagnostic tools for industrial applications. By detecting anomalies often invisible to the naked eye, thermography allows corrective action to be taken before costly system failures occur.

Thermal imaging cameras have become compact systems that look just like a normal video camera/digital camera, are easy to use and generate a real-time high-resolution image. Numerous industries worldwide have discovered the advantage of incorporating thermal imaging cameras in their industrial programs.

#### **Applications**

There are an endless number of applications for thermal imaging cameras in the Industrial area.





Poor connection and internal damage

Internal fuse damage

#### Low voltage inspections

Themal imaging cameras, are commonly used for electrical inspections. As electrical connections become loose, there is a resistance to current that can cause an increase in temperature. This can then cause components to fail, resulting in unplanned outages and injuries. In addition, the efficiency of an electrical grid becomes low prior to failure, thus energy is spent generating heat, causing unnecessary losses.





Incorrectly secured connection




Inspection of high voltage power lines

#### **High voltage inspections**

Power transformers are often checked with thermal imaging cameras. Temperatures of the cooling fins and the high voltage connections can be compared so that, if necessary, corrective action can be taken before real problems occur. Other high voltage installations that are checked with a thermal imaging camera include circuit breakers and switchers and high-voltage power lines. Potential problem areas will be clearly shown in the thermal image.





#### Mechanical

In many industries, mechanical systems serve as the backbone of operations. Thermographic data can be an invaluable source of complimentary information to vibration studies in mechanical equipment monitoring.

## District heating Laboratories Manufacturing industries

Logistics & transportation Electrical companies Sanica

www.electrolux.m www.uteco.mk







#### Thermal imaging cameras:


- Are as easy to use as a camcorder or a digital camera
- Give you a full image of the situation
- Perform inspections when systems are under load
- Identify and locate the problem
- Measure temperatures
- Store information
- •Tell you exactly what needs to be fixed
- Find the problems before real problems occur
- Save you valuable time and money





Damaged insulation

Steam trap



Refractory insulation defect

Breakdown of refractory on a rotary cement kiln

#### **Pipework**

Infrared thermography is also a great tool for detecting faults in pipes and insulation. Heat exchangers are regularly checked with infrared to detect blocked pipes. An thermal imaging camera can quickly give an overview of the entire installation. There is no need to check each pipe individually.

#### Refractory

A thermal camera systems provide rapid and accurate diagnoses for furnace maintenance, refractory loss management, condenser fin diagnosis, etc.

#### A wide range of thermal imaging cameras for industrial applications

FLIR Systems markets a full product range of thermal imaging cameras for industrial applications. Whether you are just discovering the benefits that thermal imaging cameras have to offer or if you are an expert thermographer, FLIR Systems offers you the correct tool for the job.

Discover our full product range and find out why FLIR Systems is the world leader in thermal imaging cameras.









<sup>2</sup> Mechanical & electronics tricians Maintenance

#### Unique FLIR Systems features



As the world leader in thermal imaging cameras FLIR Systems is constantly introducing new thermal imaging cameras and features that are allowing for even more efficient and faster thermal inspections.

#### "Industry first" features

Connecting thermal imaging cameras with other measurement tools has become extremely important. Results need to be analyzed and need to be sent to customers or management. In order to facilitate these tasks FLIR Systems has equipped most of its thermal imaging cameras with unique, "industry first" features.



#### WiFi compatibility

Allows to wirelessly transfer images from your thermal imaging camera.

- Show what you are seeing to a colleague or customer that is a distance away. This is extremely useful when measurements need to be done in hard to reach areas or difficult environments.
- Analyse thermal images directly on the iPad, iPhone or Android smartphone.
- · Generate comprehensive reports.
- Send the inspection reports immediately to your colleagues, customers or management via e-mail.



## FLIR Tools Mobile App for Android, iPad, iPhone, and iPod Touch

FLIR leads the way with forward-thinking Wi-Fi connectivity to Android and to iPad, iPhone and iPod Touch devices. Just download the new FLIR Tools Mobile app from Android Market or from the App Store and you're ready to see, capture and import thermal images as well as to stream and capture live video from select FLIR cameras. FLIR Tools Mobile can also be used for remote control of the camera.







#### MeterLink

FLIR MeterLink technology makes it possible to transfer, via Bluetooth, the data acquired by an Extech clamp meter into the thermal imaging camera.

- Saves time: no need to take notes during the inspection.
- Eliminates the risk of erroneous notes.
- Speeds up the reporting process: all values are automatically included in your report.
- Combine your thermal image with electrical measurement data.





#### **Touch screen**

An LCD touch screen brings interactivity and user comfort to a new level.



## **FLIR Point and shoot** thermal imaging cameras



FLIR E-Series



#### **FLIR i-Series**

FLIR i-Series thermal imaging cameras are ideal for users that are just discovering the benefits that thermal imaging has to offer. Extremely easy-to-use, they will help you to do your first thermal inspections.



#### **FLIR E-Series**

The FLIR E-Series have been developed for those that already know the benefits that thermal imaging cameras have to offer and want better image quality or more reporting options. The FLIR E-Series contain a number of useful features that will speed up your inspections drastically.

## FLIR i-Series

Easy-to-use point-and-shoot thermal imaging cameras



FLIR i3/i5/i7 are the smallest, lightest and most affordable thermal imaging cameras on the market. They are incredibly easy to use and require no former experience. It really is a matter of "point and shoot" to obtain thermal images that will immediately give you the thermal information you need.





#### **Outstanding ease-of-use**

The cameras are extremely easy to understand and operate, designed for entry-level users. The cameras are intuitive and come with a full manual.



#### **Fully automatic**

FLIR i3/i5/i7 produce instant, point-and-shoot JPEG thermal imagery with all required temperature data included.



#### Focus free

The fixed focus free lens makes using the FLIR i3/i5/i7 a snap.



#### **Compact and lightweight**

FLIR i3/i5/i7 weighs only 365 g, and is easy to store in a belt pouch.



#### **Extremely rugged**

FLIR i-Series thermal imaging cameras withstand a 2 meter drop. They are watersplash proof and IP43 rated.



#### SD card storage

Stores images with unique ID in radiometric JPEG format, containing all temperature data, on a standard miniSD card. USB file transfer to PC.



#### Reporting and analysis software included

FLIR Tools software is included and the cameras are also compatible with the more powerful FLIR Reporter.



#### **Measure temperatures**

Measures temperatures up to +250°C and detects temperature differences as small as 0.10°C (0.15°C for FLIR i3).




#### **Measurement functions**

Spotmeter, box with max./min. temperatures, isotherm above/below.\*


<sup>\*</sup> Features dependant on camera model, please check technical specifications for more details.

#### Locate electrical problems



Issues with electrical connections, wiring or other system components are clearly highlighted as "hot spots" with thermal imaging. This makes them easy to locate and repair. You can clear-Iv see the overheated connections on the thermal image.

#### Check mechanical devices



Inspection of this water pump shows no problem. The thermal image verifies that there is water in the pump cylinder and there is no danger of overheating the pump.









#### Save time and money in 3 steps:

- Detect hidden problems, make quick damage assessments and perform preventive inspections
- Identify energy losses and poor insulation
- Spot electrical faults before it is too late
- Produce instant thermal images of your findings
- Create reports, analyse and document your findings with the easy-to-use software

#### FLIR i-Series camera model comparison





7	

FLIR i3

Thermal image quality: 60x60 pixels Field of View: 12.5°(H) x 12.5°(V) Thermal sensitivity: 0.15°C

Center spot





Thermal image quality: 100x100 pixels Field of View: 21°(H) x 21°(V) Thermal sensitivity: 0.10°C

Center spot





Thermal image quality: 140x140 pixels Field of View: 29°(H) x 29°(V) Thermal sensitivity: 0.10°C

Spotmeter, area with max./min. temperature, isotherm above/below

## **FLIR E-Series**

### Lightweight design, Heavyweight performers



The FLIR E-Series are small and lightweight thermal imaging cameras designed for those needing higher resolution and more features and for whom documentation of findings are important.

The cameras are ideal for predictive maintenance and planned inspections of electrical and mechanical systems to ensure they operate at maximum efficiency and safety with minimal energy consumption.



#### Up to 320 x 240 pixels resolution

The FLIR E-Series infrared image resolution ranges from 160x120 pixels to 320x240 pixels depending on camera model. Every additional pixel means more valuable temperature information to isolate problem areas.



#### **Compact and lightweight**

FLIR E-Series models weigh only 825g (battery included).



#### **Extremely rugged**

FLIR E-Series thermal imaging cameras withstand a 2 meter drop. They are IP54 rated.



#### High quality visual camera

Visible light camera makes observing and inspecting faster and easier.



#### Thumbnail image gallery

An easy-to-access thumbnail image gallery helps you to quickly review and find your thermal images.



#### ± 2% accuracy

High accuracy of  $\pm$  2% or  $\pm$  2 °C of reading.



#### LCD touch screen

Large 3.5" LCD color touch screen.



#### **Built-in LED light**

The built-in LED lamp ensures quality visual images regardless of job site lighting levels.



#### Long life battery

With a 4 hour battery life its easy-to-replace Lithium Ion batteries will keep up with your demanding schedule.



#### **Laser Pointer**

A conveniently located button activates the laser pointer that will help you associate the hot or cold spot in the thermal image with the real physical target in the field.



#### **Picture-in-Picture (PiP)**

With the PiP-function it is easy to locate areas of interest.



#### Thermal Fusion\*

Merges visual and thermal images to offer better analysis.



#### Instant reports\*

Create instant reports directly in camera. Easy to copy reports to USB.



#### Text and voice annotations\*

Text comments can be made from a pre-defined list or by using the touch screen. A headset can be connected to make voice annotations.



#### Interchangeable lenses

In order to adapt the FLIR E-Series to every situation both wide angle and tele-lenses are available.

\* Features dependant on camera model, please check technical specifications for more details.



Large 3.5" touchscreen



Large backlit buttons fit bare hands or gloves











Connect to smartphone or tablet via Wi-Fi, using the FLIR Tools mobile app (Apple iOS and Android) for processing and sharing results as well as for remote control.


The FLIR E-Series is equipped with a digital camera, a LED lamp and a laser pointer.



Motor: Bearing Problem.



Inspecting a transformer using the Fusion Picture-in-Picture function.



Motor: Internal Winding Problem.



Mechanical check-up of an electrical motor using the FLIR E-Series.



Damaged insulation.



Check-up of an air conditioning installation quick and easy.

#### FLIR E-Series camera model comparison

#### FLIR E30

Thermal image quality:

Thermal sensitivity: <0.1°C

1 box with min./max./average

Built-in 2 Mpixels camera

Temperature range: -20°C to +350°C

160x120 pixels

Spotmeter: 1



#### FLIR E40



Thermal sensitivity: <0.07°C

Temperature range: -20°C to +650°C

Spotmeter: 3

3 boxes with min./max./average

Built-in 3.1 Mpixels camera

Delta temperature measurement

Voice / text annotations

MeterLink™

Bluetooth® / WiFi

1-2x continuous digital zoom

PiP IR area on visual image

Non-radiometric IR-video recording

Non-radiometric IR-video streaming

Radiometric IR-video recording

Thermal image quality:

160x120 pixels

#### FLIR E50

Thermal image quality:




240x180 pixels Thermal sensitivity: <0.05°C Temperature range: -20°C to +650°C Spotmeter: 3 3 boxes with min./max./average Built-in 3.1 Mpixels camera Delta temperature measurement Voice / text annotations MeterLink™ Bluetooth® / WiFi 1-4x continuous digital zoom PiP Scalable IR area on visual image Non-radiometric IR-video recording Radiometric IR-video recording Non-radiometric IR-video streaming Thermal Fusion

#### **FLIR E60**



Thermal image quality: 320x240 pixels Thermal sensitivity: <0.05°C Temperature range: -20°C to +650°C Spotmeter: 3 3 boxes with min./max./average Built-in 3.1 Mpixels camera Delta temperature measurement Voice / text annotations MeterLink™ Bluetooth® / WiFi 1-4x continuous digital zoom PiP Scalable IR area on visual Non-radiometric IR-video recording Radiometric IR-video recording Non-radiometric IR-video streaming Thermal Fusion Instant report



#### A full product range

At FLIR Systems we realize that different users have different needs. Therefore we have developed a full product range of thermal imaging cameras. More advanced models contain more features and allow to do your work faster and more efficient. They are the ideal tools for the expert and professional users.

#### Expert and professional models: better image quality

Just like in photography, having an image which is composed of more pixels means that the camera produces higher quality images. But there is more. A thermal imaging camera with  $640 \times 480$  pixels has 307,200 temperature measurement points in one image which is four times more than a camera with 320  $\times$  240 pixels and 76,800 temperature measurement points. When looking at the same target from the same distance, more pixels will cover the target. This will result in much better measurement accuracy.

#### Image of a hot spot on a power line in a utility substation taken at a distance of about 20m.




Image taken with 120 x 120 pixels resolution and <100mK thermal sensitivity.




Image taken with 320  $\times$  240 pixels resolution and 50mK thermal sensitivity. Please note how the increased number of pixels will result in a more accurate temperature reading in the hot spot.




Image taken with 640 x 480 pixels resolution and <45mK thermal sensitivity. Notice how the hot spot now is clearly visible and that the increased number of pixels will result in an even more accurate temperature reading in the hot spot. It is now clear that there is a problem in the power line.

#### **Ergonomics**

When you are an expert or professional and using your camera several hours per day you need an ergonomic tool. No matter where the area to be inspected is located, you need to be able to handle your camera in an easy, ergonomic way. This will not only increase your analysis capabilities in the field but it will also increase your productivity.





#### Multi Spectral Dynamic Imaging (MSX)

A new, patent-pending technology based on FLIR's unique onboard processor that provides extraordinary thermal image details in real time.


- · Real-time thermal video enhanced with visible spectrum definition
- · Exceptional thermal clarity to highlight exactly where the problem is
- · Easier target identification without compromising temperature data
- Unrivalled image quality. No need for a separate digital photo for reports

Unlike traditional thermal fusion that inserts a thermal image into a visible-light picture, FLIR's new MSX embosses digital camera detail onto thermal video and stills.


# \$FLIR R 23 |3 14 |4 N51\*56249 |7 E4\*40.160 0

#### **Instant Results in real time:**

- · Sharper-looking thermal images
- · Quicker target orientation
- · Clutter-free reports
- · Faster route to solutions



Thermal image of an overheated fuse.



Thermal image of the same overheated fuse, now using the MSX-setting. Note that the text below the fuse is readable, making it very easy to identify and repair the correct fuse at a later stage.

#### Image sketch


This new FLIR Systems feature allows to clearly indicate on a saved image the location of the problem area both on the thermal and the visual image. This can be done immediately on the touch screen of the camera. The indications you make on the thermal image will automatically appear in your report.



#### Continuous auto-focus

A solution with two digital cameras allows for continuous autofocus of the thermal images. Continuous auto-focus makes the FLIR T640 the first fully automatic thermal imaging camera on the market.



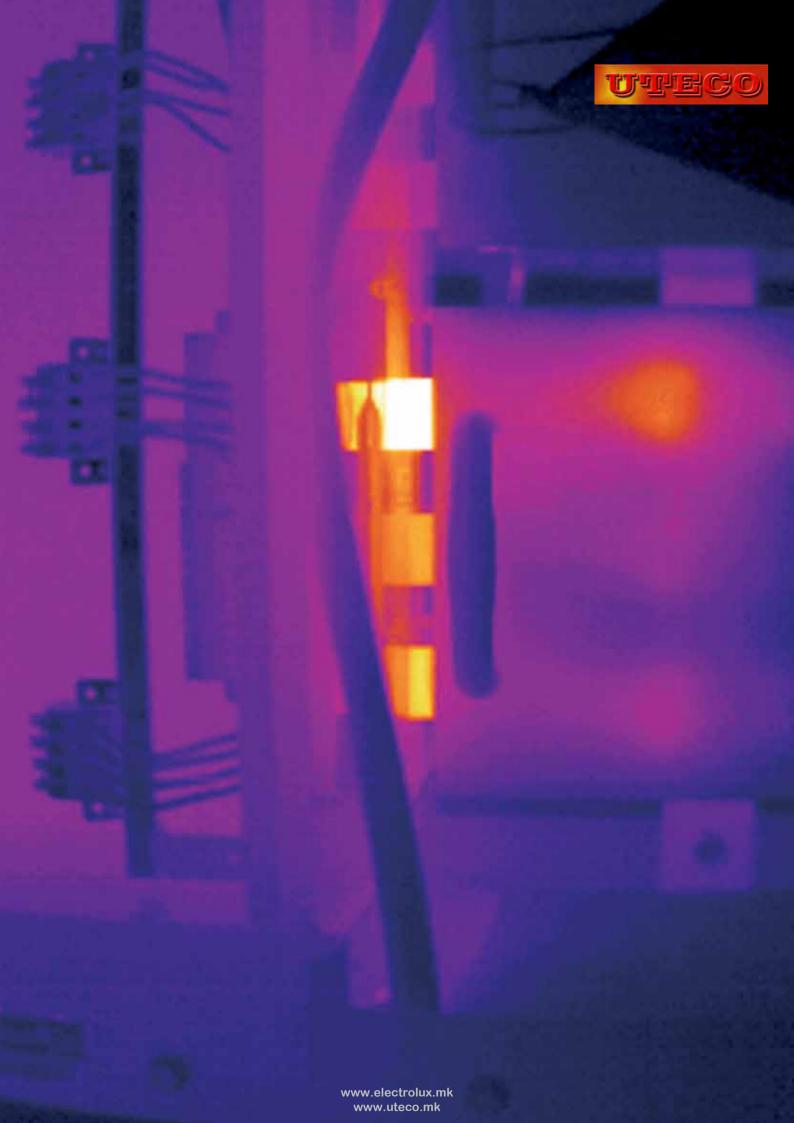

## FLIR thermal imaging cameras for the expert and professional users





#### FLIRT250 & T335

The FLIR T250 and T335 take ergonomics to a new level. Thanks to a tiltable lens unit you are able to always hold the camera in a comfortable postion.



#### T400-Series

The FLIR T400-Series offers a good performance at an affordable price. Excellent ergonomics and easy communication make the FLIR T400-Series a truly user-friendly camera for the beginner and advanced user.



#### FLIRT600-Series

The FLIR T600-Series is designed for the expert requiring the highest performance and the latest technology available. The cameras combine excellent ergonomics with superior image quality of 640 × 480 pixels IR resolution. The cameras are flexible and can meet your every need, and have extensive communication possibilities.



#### FLIR P-Series

The FLIR P-Series are thermal imaging cameras designed for the expert having the camera as the number one tool. The P-series cameras offer a superior image quality, the highest sensitivity and accuracy as well as the widest array of possibilities available. All tailor made to fulfill the demand of the expert depending on an accurate and full featured instrument to perform the work.

## **FLIRT250 / FLIRT335**

## The choice of the advanced thermographer

The FLIR T-Series of portable thermal imaging cameras takes ergonomics, weight and ease-of-use to a new level. Usability is key: our engineers have translated user feedback on comfort and clarity into a series of comprehensive and innovative features. Furthermore, the FLIR T-Series has been specifically developed for industrial environments.



#### Up to 320 x 240 pixel resolution

The T-Series thermal image resolution ranges from 240 x 180 pixels to 320 x 240 pixels\*.



#### **Camera sensitivity**

The thermal sensitivity in the FLIRT-Series ranges from 80 mK to < 50 mK\*.



#### High quality visual camera

All models in the FLIRT-Series have an integrated 3.1 Mpixel digital camera. This makes observing and inspecting faster and easier .



#### Measurement range

The T-series can measure temperature between -20°C to +1.200°C.



#### Interchangeable infrared lenses

The T-Series features a standard 25° lens and optional 6°, 15°, 45° and 90° lenses.



#### Flexible interfaces

The T-Series is equipped with standard video, USB outputs as well as a removable SD card.



#### MPEG-4 video

Create visual and infrared non radiometric MPEG-4 video files.



#### Temperature sound, image alarms

Make surveying easier and faster.



#### **Picture-in-Picture**

Create an infrared overlay on your visual image. Scalable, moveable and resizable.



#### **Text and voice annotations**

Text comments can be made from a pre-defined list or using the touch screen. A headset can be connected to make voice annotations.



#### Sketch annotations

Use the touch screen as pen and paper to add sketch annotations.



#### Radiometric IR video streaming

16 bit radiometric IR video can be streamed to a PC (via USB) running the FLIR R&D software.



#### **Touch screen**

3.5" LCD touch screen plus stylus brings interactivity and user comfort to a new level.



#### **Measurement Modes**

Measurement spots, area with auto hot/cold spot indication, isotherms, ΔT calculation.



#### Copy to USB

Transfer on board images or reports directly from the thermal imaging camera to a USB stick.



#### **Instant reports**

Create instant reports directly in camera, easily copy report to USB.

\* Features dependant on camera model, please check technical specifications for more details.







Multifunctional LCD touch screen allows sketching and marking directly on the screen



Multifunctional LCD touch screen allows quick and easy camera software menu handling.




High quality visual images.

## FLIR T250 / T335 camera model comparison

FLIRT250	FLIRT335
Thermal image quality: 240x180 pixels	Thermal image quality: 320x240 pixels
Temperature range: -20°C to +350°C	Temperature range: -20°C to +650°C
80 mK NETD	< 50 mK NETD
2x continuous digital zoom	4x continuous digital zoom
Picture-in-Picture (scalable)	Picture-in-Picture (resizable/moveable)
1 Image marker	4 Image markers
	DeltaT
	Instant reports

#### Picture-in-Picture



MeterLink





NEW

## FLIR T400-Series

## Excellent ergonomics and extensive communication possibilities

The FLIR T400-Series offers a good performance at an affordable price. Excellent ergonomics and easy communication makes the FLIR T400-Series a truly user-friendly camera for the beginner and advanced user. With extensive communication possibilities including Wi-Fi and MeterLink (Bluetooth). The latest technology integrated in the camera allows for fast image processing and storage.



#### 320 x 240 pixel resolution

The T400-Series has a thermal image resolution of 320  $\times$  240 pixels.



#### Image sketch

Indicate problem areas directly on the thermal image.



#### **Camera sensitivity**

The FLIR T400-series has a thermal sensitivity of < 45 mK.



#### Radiometric IR video streaming

16 bit radiometric IR video can be streamed to a PC (via USB) running the FLIR R&D software.



#### High quality visual camera

Both models in the FLIR T400-Series have an integrated 3.1 Mpixel digital camera.



#### **Image storage**

FLIR uses a non proprietary radiometric JPEG image format that allows for post processing and report writing with Microsoft Word® based FLIR software.



#### Measurement range

The T400-series can measure temperatures up to +1200°C.



#### **Touch screen**

3.5" LCD touch screen brings interactivity and user comfort to a new level.



#### Interchangeable infrared lenses

The T400-Series features a standard 25° lens and optional 6°, 15°, 45° and 90° lenses.



#### **Measurement Modes**

Measurement spots, area with auto hot/cold spot indication, isotherms, ΔT calculation.



#### Flexible interfaces

The T400-Series is equipped with standard video, USB outputs as well as a removable SD card.



#### Copy to USB

Transfer on board images or reports directly from the thermal imaging camera to a USB stick.



#### MPEG-4 video

Create visual and infrared non radiometric MPEG-4 video files.



#### **Instant reports**

Create instant reports directly in camera, easily copy report to USB.



#### Thermal Fusion

Merges visual and thermal images to offer better analysis.




#### Multi Spectral Dynamic Imaging (MSX)

The innovative MSX feature produces an image more rich in every detail than ever before.



#### Temperature sound, image alarms

Make surveying easier and faster.





#### Picture-in-Picture

Create an infrared overlay on your visual image. Scalable, moveable and resizable.





#### Text and voice annotations

Text comments can be made from a pre-defined list or using the touch screen. A headset can be connected to make voice annotations.



#### **Sketch annotations**

Use the touch screen as pen and paper to add sketch annotations.

#### Thermal Fusion







Visual image Thermal image

Thermal Fusion image



#### FLIR T400-Series camera model comparison



## Multi Spectral Dynamic Imaging (MSX)






MSX allows seeing even more detail on the thermal image.

#### Image sketch



Multifunctional LCD touch screen allows sketching and marking directly on the screen

#### Picture-in-Picture



MeterLink





## FLIRT600-Series

State-of-the-art thermal imaging cameras that combine good ergonomics and flexibility with high image quality

The FLIRT600-Series offer a crisp thermal image of 640 x 480 pixels on which the smallest of details can be seen. The T600-Series is flexible, can meet your every need and has extensive communication possibilities.



#### Up to 640x480 pixel resolution

The high definition 640x480 pixels detector generates crisp and clear detailed images that are easy to interpret, resulting in reliable inspections with higher accuracy.



#### Picture-in-picture

Create an infrared overlay on your visual image. Moveable and resizable.



#### **High sensitivity**

The T640 allows you to see temperature differences as small as 0.035°C.



#### Touch screen

The LCD touch screen brings interactivity and user comfort to a new level. In combination with the large backlit buttons and joystick control the T600-Series is very easy to use.



#### Tiltable IR unit

The tiltable IR unit gives you great flexibility and allows you to work faster and in a comfortable position during your inspections.



#### Sketch annotations

Include a sketch with the thermal image of the inspected object, just draw it on the touch screen.



#### Large bright 4.3 inch LCD screen

The high quality LCD screen presents sharp and bright images also in outdoor environments.



#### Text and voice annotations

Text comments can be selected form a list. A Bluetooth headset can be connected to make voice annotations.



#### Viewfinder (FLIRT640)

The high-resolution viewfinder is ideal for outdoor use or when the LCD screen is not used.



#### Digital zoom

The FLIR T640 is equipped with a 1-8x continuous digital zoom and the T600/T620 with a 1-4x zoom.



#### High quality visual camera

An integrated 5 megapixel visual camera generates crisp visual images in all conditions. Field of view



adapts to IR-lens. **Laser Pointer** 

The position of the laser pointer is highlighted on

the thermal image, which helps you associate the hot spot in the image with the physical target.



Multi Spectral Dynamic Imaging (MSX) The innovative MSX feature produces an image more rich in every detail than ever before.



#### Flexible interfaces

Easy access to Digital Video Interface, USB for connecting external devices, USB2 for PC communication and a direct connection to charge the battery inside the camera.



#### Image sketch

Indicate problem areas directly on the thermal



#### Radiometric IR video streaming

16 bit radiometric IR video can be streamed to a PC (via USB) running the FLIR software.



#### **Continuous auto-focus**

Continuous automatic focus on the object that you are inspecting.



#### MPEG-4 video

Create visual and infrared non radiometric MPEG-4 video files.



#### **Built-in GPS**

GPS allows to georeference thermal images to determine their geographic location.




#### **FLIRThermal Fusion**

Merges visual and thermal images for better analysis.

Features dependant on camera model, please check technical specifications for more details.









#### FLIR T600-Series model comparison

FLIRT600	FLIRT620	FLIRT640
Thermal image quality: 480x360 pixels	Thermal image quality: 640x480 pixels	Thermal image quality: 640x480 pixels
Thermal sensitivity: <40 mk @ +30°C	Thermal sensitivity: <40 mk @ +30°C	Thermal sensitivity: <35 mk @ +30°C
Temperature range: -40°C up to +650°C	Temperature range: -40°C up to +650°C	Temperature range: -40°C up to +2,000°C
1-4x continuous, digital zoom	1-4x continuous, digital zoom	1-8x continuous, digital zoom
	GPS	GPS
	Instant Report	Instant Report
		Live line profile
		MSX
		Image sketch on thermal and visual
		Continuous auto-focus
		Viewfinder
		Measurement presets

## **FLIR P-Series**






The FLIR P-Series are thermal imaging cameras designed for the thermography expert having the camera as the number one tool. The P-Series cameras offer a superior image quality, the highest sensitivity and accuracy as well as the widest array of possibilities available. All tailor made to fulfill the demand of the expert depending on an accurate and full featured instrument to perform the work.



#### 640x480 pixel resolution

The P-Series have a high resolution pixel detector of 640x480 pixels that allows more accuracy and shows more details at a longer distance.








image details and temperature difference information.



An integrated 3.2 megapixel visual camera for generating crisp visual images in all conditions.



contrast adjustments to making it easier to produce thermal analyzes of detailed objects.

#### Panorama support

Take images in a sequence and automatically combine them to one large image using the FLIR Reporter software.

#### **Built-in GPS (P660)**

GPS allows to georeference thermal images to determine their geographic location.

#### **Laser Pointer** Helps you associate the hot or cold spot in the IR

image with the real physical target in the field.

#### Flexible interfaces

Easy access to composite video connection, USB, FireWire (P640 & P660), and a direct connection to charge the battery inside the camera.

#### MPEG-4 video (P640/660)

Create visual and infrared non radiometric MPEG-4 video files.

#### **FLIR Thermal Fusion**

Merges visual and infrared images to offer better analysis.

#### Picture-in-picture Create an infrared overlay on your visual image.

Moveable and resizable.


#### **Radiometric JPEG**


FLIR uses a non proprietary radiometric JPEG image format that allows for post processing and report writing with Microsoft Word® based FLIR software.



#### **Text and voice annotations**

Text comments can be uploaded to the camera through a wireless IrDa interface. A Bluetooth® wireless headset can be connected to make voice annotations which are stored with the image.





The high-resolution viewfinder is tiltable and can be adapted to the individual user. It is ideal for outdoor use or when the LCD screen is not used.

#### Large LCD screen

Super size 5.6" foldable high-quality LCD screen allows you to see the smallest details and temperature differences.

#### Multi-angle handle with integrated direct access buttons

A turnable control grip allows you to use the camera in the most comfortable position. The buttons and joystick to control the camera are integrated in this handle and always stay right underneath your fingertips.

#### Programmable direct access buttons

For increased flexibility the operator can program buttons located on the top of the camera for direct access to favourite functions.

Features dependant on camera model, please check technical specifications for more details.





Connect to smartphone or tablet via Wi-Fi, using the FLIR Tools mobile app (Apple iOS and Android) for processing and sharing results as well as for remote control.



#### Contrast optimizer







Thermal image enhanced with the Contrast Optimizer function.





## FLIR P-Series camera model comparison

#### FLIR P620



<40 mK sensitivity,
accuracy +/- 2%
Standard 24° or 45° lens
2x digital zoom
Standard measurement functions
Laser Pointer
USB connection
3 spotmeters / 3 boxes or circles

#### **FLIR P640**



<30 mK sensitivity,
accuracy +/- 2%
Wide choice of optics
8x digital zoom
Extended measurement function
Laser Pointer
USB and Firewire connection
10 spotmeters / 5 boxes or circles
Line profile
Set temperature alarms
Radiometric and non-radiometric
video recording
Sequence recording in camera


#### FLIR P660



<30 mK sensitivity,
accuracy +/- 1%
Wide choice of optics
8x digital zoom
Extended measurement functions
Advanced Laser Pointer
USB and Firewire connection
10 spotmeters / 5 boxes or circles
Line profile
Set temperature alarms
Radiometric and non-radiometric
video recording
Sequence recording in camera

#### High resolution





Thermal image of a high voltage installation taken from a longer distance still allows you to see all details.



Visual image



Thermal image



Thermal Fusion image

Inspections in a substation using infrared technology reveals overheated components.

Built-in GPS

## **FLIR IRW-Series**

## FLIR IRW-Series IR Inspection Windows

Opening electrical cabinets to perform thermal and visual inspections of live components is dangerous work, exposing you to the risk of a hazardous arc flash incident. Now you can put the added safety of new FLIR IR Windows between you and energized equipment to better protect yourself and eliminate the need for opening enclosures.











#### FLIR IR-Windows features



#### **Easy Installation**

FLIR IR Windows install quickly and securely using the same design as common conduit connections:

- Only one hole to create for each window
- One simple PIRma-Lock™ ring nut to tighten
- Uses standard US punch tools for hole knockouts



#### PIRma-Lock™ Reliability

Tried and true locknut technology makes FLIR's locking ring an IR window first:

- Teeth lock tight to the inside of the panel
- Automatically grounds metal components
- No screw holes required that might later strip out



#### **Quick Access Hinged Cover**

Simple thumb screw releases the permanently-hinged IR window cover:

- Easy, flip-open hatch for faster scans
- Prevents dropping, mix-ups, and loss
- Inside label for permanent identification



#### **Broadband Crystal IR Window**

Lens encased in rugged, anodized aluminum frame allows indoor & outdoor scans:

- Transmits short, mid and longwave IR images
- Supports visual inspections and fusion features
- Lets laser pointers and illumination shine through



#### **Greater Productivity and ROI**

Significantly reduces inspection time for more efficient assessments within NFPA 70E guidelines:

- Requires only one person instead of three
- Eliminates need for cumbersome PPE
- Helps reduce vast majority of arc flash triggers



#### **FLIR Integrity**

FLIR backs IRW-Series windows with comprehensive testing and a limited lifetime warranty:

- Meets relevant UL, CSA, IEC, and IEEE standards and ratings
- Tested by reputable agencies such as UL, KEMA, and TUV
- Tested samples withstood arcs, vibration, and extreme humidity
- Limited Lifetime Warranty against manufacturer defects





**OFUR** 

Easy placement.



Single PIRma-Lock™ ring nut.

## Software



At FLIR Systems, we recognize that our job is to go beyond just producing the best possible thermal

imaging camera systems. We are committed to enabling all users of our thermal imaging camera systems to work more efficiently and productively by providing them with the most professional camera-software combination.

Our team of committed specialists are constantly developing new, better and more user-friendly software packages to satisfy the most demanding thermal imaging professionals. All software allows fast, detailed and accurate analysis and evaluation of thermal inspections.

#### FLIR Reporter

#### **Creating compelling and professional reports**

FLIR Reporter is a powerful software for creating compelling and professional reports with powerful new TripleFusion, Picture-in-Picture, and the latest Microsoft operating system and Word compatibility.

#### Flexible report design and layout

- Fully integrated with Microsoft Word™
- · Powerful temperature analysis
- Wizard-guided report generation
- TripleFusion Picture-in-Picture (movable, sizable, scalable)
- Automatic report generation by drag-and-drop
- Predictive trending functionality
- Automatic link to Google™ Maps for images with GPS coordinates

# CLIATE

FLIR Reporter allows for fast and easy generation of professional inspection reports.

#### **TripleFusion Picture-in-Picture capabilities**

FLIR Reporter's Picture-in-Picture (PIP) features to make your reporting easy and efficient. Simply download thermal and visible images to Reporter. Easy-to-use dialog boxes and dragand-drop features help you superimpose a smaller thermal image inside the visible light photo.

#### **Automatic report generation**

With FLIR Reporter it's easy to create customized reports. The ReportWizard guides you step-by-step to make a professional inspection report.

#### **Compatible with GPS**

For FLIR customers having built-in GPS capability with their cameras, FLIR Reporter provides an automatic link to  $Google^{TM}$  Maps for images with GPS coordinates.

#### **Predictive trending functionality**

Trending is a powerful tool to help you track thermal information relating to your thermal surveys. Armed with this information you can better determine when maintenance procedures need to be performed.

#### More advanced features


FLIR Reporter includes numerous advanced features, including: digital zoom, color palette changes, play back of voice comments recorded in the field. Automate calculations with the powerful formula tool and the time-saving one-click  $\Delta T$  function. Instant report summary creation with the Summary Table tool. Histogram and line profile graph features to facilitate more advanced analysis.

#### **FLIR Reporter Key features:**


- Flexible report page design and layout for customized reports
- Use quick insert function to easily create custom report pages
- Fully integrated with standard Microsoft Word
- Generates reports in standard MS Office format and PDF-format
- Powerful temperature analysis
- Triple Fusion Picture-in-Picture (movable, sizable, scalable)
- Rapid report manager supporting automatic report generation by drag-and-drop
- Trending functionality
- Automatic link to Google<sup>™</sup> Maps for images with GPS coordinates
- · Automatic summary table for the report
- Fine tune images and make full temperature analysis directly in Microsoft Word
- Spell check
- Create your own formulas including measurement values from images
- · Play radiometric sequences directly in the report
- Search functionality to quickly find images for your report
- Panorama tool for combining several images to a larger image
- Windows 7, 32 and 64-bit
- Support for MeterLink<sup>™</sup> data
- \*.docx compatibility
- · Grid function



FLIR users that have a built in GPS in their thermal imaging camera can seamlessly integrate the GPS coordinates into Reporter.



Trends: Accurately track thermal performance over time with easy-tounderstand charts and graphs.



## FLIR Tools: Software with every thermal imaging camera

FLIR Systems has since long realized the importance of making inspection reports. That is why every FLIR Systems thermal imaging camera is coming with software that allows users to organize and analyze the images from their thermal imaging cameras and present them in a report. The software allows for adjusting image settings such as color palette, level and span and for basic thermal analysis.

Users that want more flexibility and more analysis tools can choose for FLIR Reporter.

#### FLIR Tools Mobile

### FLIR Tools Mobile App for Android, iPad, iPhone, and iPod Touch

FLIR leads the way with forward-thinking Wi-Fi connectivity to Android and to iPad, iPhone and iPod Touch devices. Just download the new FLIR Tools Mobile app from Android Market or from the App Store and you're ready to see, capture and import thermal images as well as to stream and capture live video from select FLIR cameras.

FLIR Tools Mobile can also be used for remote control of the camera.






#### FLIR Infrared Training Center



The Infrared Training Center (ITC) offers the world's leading infrared training and thermographer certification programs.

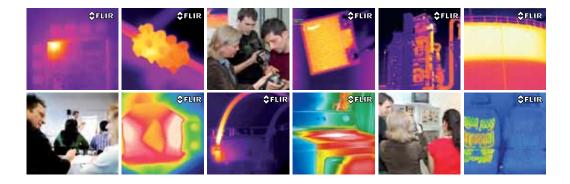

Although all our cameras are designed for easy installation and operation, there is a lot more to thermal imaging than just knowing how to handle the camera. As the leading company for thermal imaging technology, we like to share our knowledge with our customers and other interested parties.

We therefore organize regular courses and seminars. We also organize in-company training on request, so that you, or your staff, can gain familiarity with thermal imaging and its applications.

The ITC not only welcomes FLIR Systems customers but also users of other brands of cameras. In fact, anyone who wants to learn more about thermal imaging for any applications, before deciding to purchase a camera, is also invited.

The mission of the ITC is to make our customers and partners successful by enhancing their knowledge of IR technology, thermal imaging products, and relevant applications. The ITC offers a portfolio of courses that presents the right mix of theoretical and practical content to help professionals quickly apply thermal imaging technology to real life applications.

All our instructors are experienced thermal imaging specialists. Not only do they have a profound theoretical knowledge but they also have practical experience with numerous applications. For our customers, this means that attending one of the ITC's courses will give them a real hands-on learning experience.

Follow one of our courses and become a thermal imaging expert.



Each ITC course is a perfect combination of theoretical fundamentals and practical excercises. It guarantees participants a real hands-on learning experience.

## After Sales

#### FLIR After Sales

At FLIR Systems, building a relationship with a customer takes more than just selling a thermal imaging camera. After the camera has been delivered, FLIR Systems is there to help meet your needs.



Once purchased, thermal imaging cameras are vital pieces of equipment. To keep them running at all times, we operate a worldwide service network with subsidiaries in Belgium, China, France, Germany, Hong Kong, Italy, the Netherlands, Sweden, United Arab Emirates, the United Kingdom and the USA.

If there should be a problem with one of our camera systems, these local service centers have all the know-how and equipment to solve it within the shortest possible time. Local camera service gives you the assurance that your system will be ready for use again within an extremely short timeframe.

Buying a thermal imaging camera is a long-term investment. You need a reliable supplier who can provide you with support over a long period of time.

Our service personnel regularly follows training programs at our production facilities in Sweden or the USA. Not only to learn about the technical aspects of the products, but also to familiarize themselves with your individual customer requirements and the latest applications.

Different types of maintenance contracts can be offered to make sure that, whatever happens, your thermal imaging camera is always available for use.

CUSTOMER CARE is not just a slogan. We write it in capital letters at FLIR.



## Accessories



Flexible systems that meet your changing needs

In today's fast-changing environment, requirements for purchased capital equipment can change from year to year or from project to project. Things that are vital today can be redundant tomorrow.

That makes it important for the equipment in which you invest to be flexible enough to meet the ever-changing needs of your applications. No other thermal imaging camera manufacturer offers a wider range of accessories than FLIR Systems.

Hundreds of accessories are available to customize our cameras for a wide variety of imaging and measurement applications.

From a comprehensive range of lenses, through LCD screens to remote control devices, everything is available to tailor your camera to your own, specific application.





## FLIR i3 / i5 / i7

## Technical specifications

#### Camera specific

	FLIR i3	FLIR i5	FLIR i7
Field of view/min focus distance	12.5° x 12.5°/0.6 m	21° x 21°/0.6 m	29° x 29°/0.6 m
Thermal sensitivity	0.15°C	0.10°C	0.10°C
IR Resolution	60 x 60 pixels	100 x 100 pixels	140 x 140 pixels
Measurement modes	Center spot	Center spot	Center Spot, box with max./min. temp., isotherms above/below selected temperature interval

#### General

General	
Imaging performance	
Spectral range	7.5 - 13 μm
Spatial resolution (IFOV)	3.7 mrad
Image Frequency	9 Hz
Focus	Fixed
Focal Plane Array (FPA)	Uncooled microbolometer
Image Presentation	
Display	2.8" color LCD
Measurement	
Object temperature range	-20°C to +250°C
Accuracy	±2 °C or ±2% of reading
Measurement analysis	
Emissivity correction	Variable from 0.1 to 1.0 or selected from list of materials
Reflected apparent temperature correction	Automatic, based on input of reflected temperature
Setup	
Color palettes	Iron, Rainbow and Black/White
Set-up controls	Local adaptation of units, language, date and time formats; automatic shutdown
Image Storage	
Туре	MiniSD card
File format	Standard JPEG - 14 bit measurement data included
Power	
Battery Type	Li-lon rechargeable
Battery operating time	5 hours , display shows battery status
Charging system	In camera, AC adaptor; 3 hours to 90% capacity
AC operation	AC adaptor 90-260 VAC input
Power management	Automatic shutdown (user selectable)
Adaptor voltage	5 VDC out
Environmental specifications	
Operating temperature range	0°C to +50°C
Storage temperature range	-40°C to +70°C
Humidity	Operating and storage IEC 60068-2-30/24 h 95% relative
Shock	humidity 25G, IEC 60068-2-29
Vibration	2G, IEC 60068-2-6
Drop	2 m
Encapsulation	Camera housing and lens: IP43
Physical characteristics	
Dimensions	223 x 79 x 83 mm
Weight	365g, including battery
Shipping size	120 x 400 x 320 mm
Shipping weight	2.8 kg

#### Standard package

FLIR i3, FLIR i5 or FLIR i7 thermal imaging camera, hard transport case, FLIR Tools™ PC software CD-ROM, printed getting started guide, printed important information guide, warranty extension card, user documentation CD-ROM, calibration certificate, hand strap, battery (inside camera), power supply/charger with EU, UK, US and Australian plugs, USB cable, miniSD card, with SD card adaptor







\* After product registration on www.flir.cor

## FLIR E-Series

## Technical specifications

#### Camera specific









	W.	<b>W</b>		-
	FLIR E30	FLIR E40	FLIR E50	FLIR E60
Imaging Performance				
IR resolution	160 × 120 pixels	160 × 120 pixels	240 × 180 pixels	320 × 240 pixels
Spatial resolution	2.72 mrad	2.72 mrad	1.82 mrad	1.36 mrad
Thermal sensitivity	< 0.1 °C	< 0.07 °C	< 0.05 °C	< 0.05 °C
Zoom	N/A	1-2x continuous digital zoom, incl.	1-4x continuous digital zoom, incl.	1-4x continuous digital zoom, incl.
		panning	panning	panning
Image presentation				
Picture in Picture	N/A	IR area on visual image	Scalable IR area on visual image	Scalable IR area on visual image
Thermal Fusion	N/A	N/A	Yes	Yes
Image modes	IR image, visual image, thumbnail	•	IR image, visual image, thermal	IR image, visual image, thermal
	gallery	gallery	fusion, picture-in-picture, thumbnail	fusion, picture-in-picture, thumbnail
	gunery	gunery	gallery	gallery
			ganory	gunory
Measurement	2000 +- 120 00 / 200 +- 200 00	2000 + 120 00 / 200 + 250 00	2000 +- 120 00 / 200 +- 200 00	2000 +120 00 / 200 +050 00
Ubject temperature range	-20°C to +120 °C / 0°C to +350 °C	-20°C to +120 °C / 0°C to +650 °C	-20°C to +120 °C / 0°C to +650 °C	-20°C to +120 °C / 0°C to +650 °C
Measurement analysis				
Spotmeter	1	3	3	3
Area	1 box with min./max./average	3 boxes with min./max./average	3 boxes with min./max./average	3 boxes with min./max./average
Difference temperature	N/A	Delta temperature between	Delta temperature between	Delta temperature between
		measurement functions or	measurement functions or	measurement functions or
		reference temperature	reference temperature	reference temperature
		·		·
Reporting				
Instant report	N/A	N/A	N/A	Yes
Digital comerc				
Digital camera Built-in digital camera	2 Mpixels, and one LED light	3.1 Mpixels, and one LED light	3.1 Mpixels, and one LED light	3.1 Mpixels, and one LED light
Duilt-iii digitai camera	2 Mpixers, and one LED light	3.1 Mpixers, and one LED light	3.1 Mpixers, and one LED light	3.1 Mpixels, and one LED light
Image annotations				
Voice	N/A	60 seconds via Bluetooth®	60 seconds via Bluetooth®	60 seconds via Bluetooth®
Text	N/A	Text from predefined list or soft	Text from predefined list or soft	Text from predefined list or soft
		keyboard on touch screen	keyboard on touch screen	keyboard on touch screen
MeterLink	N/A	Possible to connect, via Bluetooth,	Possible to connect, via Bluetooth,	Possible to connect, via Bluetooth,
		Extech Moisture meter M0297 or	Extech Moisture meter M0297 or	Extech Moisture meter M0297 or
		Extech clamp meter EX845	Extech clamp meter EX845	Extech clamp meter EX845
Data communication interfa	2000			
Bluetooth®, WiFi	N/A	Yes	Yes	Yes
	11/17	100	100	100
Video streaming/recording		MARSON	110501	MARSON
Non-radiometric IR-video	N/A	MPEG4 to memory card	MPEG4 to memory card	MPEG4 to memory card
recording				
Radiometric IR-video	N/A	Full dynamic to PC using USB	Full dynamic to PC using USB	Full dynamic to PC using USB
streaming				
Non-radiometric IR-video	N/A	Uncompressed colorized video	Uncompressed colorized video	Uncompressed colorized video
streaming		using USB	using USB	using USB

#### General

Imaging Performance	
FOV / Minimum focus distance	25° × 19° / 0.4 m
Spectral range	7.5–13 µm
Image frequency	60 Hz
Focus	Manual
Focal Plane Array (FPA)	Uncooled microbolometer
	One one of microbotionic ter
Image presentation	D 1/4 1 O F# LOD
Display	Built-in 3.5" LCD touch screen, 320 × 240 pixels
Measurement	
Accuracy	±2 °C or ±2% of reading
Measurement analysis	
Automatic hot/cold detection	Auto hot or cold spotmeter markers within area
Emissivity correction	Variable from 0.01 to 1.0 or selected from list of materials
Measurement corrections	Reflected temperature, optics transmission and atmospheric transmission
Isotherm	Detect high/low temperature/interval
Set-up	
Image controls	Palettes (Arctic, Gray, Iron, Lava, Rainbow and Rainbow HC), image adjustment (auto/manual)
Set-up controls	Local adaptation of units, language, date and time formats; automatic shutdown , display intensity
	Local dauptation of anito, language, date and anite formats, datemate shattown, display intensity
Laser pointer	
Laser alignment	Position is displayed on the IR image
Image storage	
Format	Standard JPEG - including measurement data on SD memory card
Туре	IR/visual images; simultaneous storage of visual and IR images
Power	
Battery type	Lithium-lon (field replaceable) - 4 hours operating time
Charging system	In camera, AC adaptor, 2-bay charger or 12 V from a vehicle
Power management	Automatic shutdown and sleep mode (user selectable)
AC operation	AC adaptor, 90-260 V AC
Adaptor voltage	12 V output to camera
Environmental specifications	
Operating temperature range	-15 to +50 °C
Storage temperature range	-40 to +70 °C
Humidity	IEC 60068-2-30/24 h 95% relative humidity +25 °C to +40 °C / 2 cycles
Shock / Vibration	25 g (IEC 60068-2-29) / 2 g (IEC 60068-2-6)
Drop	2 m
Encapsulation	IP 54 (IEC 60529)
Data communication interfaces	
Interfaces	USB-mini, USB-A, Composite video
USB	USB-A: Connect external USB device - USB-mini-B: Data transfer to and from PC / Streaming MPEG 4
	ODD-A. Commest external ODD device - ODD-Imini-D. Data transfer to and nomin 6/ Streaming INFEC 4
Physical characteristics	
Camera weight, incl. battery	0.825 kg
Camera size (L × W × H)	246 × 97 × 184 mm
Shipping size	560 x 370 x 190 mm
Shipping weight	5.3 kg
Standard nackago	

Standard package
FLIR E30, FLIR E40, FLIR E50 or FLIR E60: Hard transport case, Thermal imaging camera with lens, Battery, Hand strap, Calibration certificate, FLIR Tools<sup>TM</sup> PC software CD-ROM, Memory card, Lens cap, Power supply incl. multiplugs, Printed Getting Started Guide, Printed Important Information Guide, USB cable, User documentation CD-ROM, Video cable, Warranty extension card or Registration card







## FLIRT250 /T335

## Technical specifications

#### Camera specific





	FLIR T250	FLIR T335
Imaging performance		
Thermal sensitivity/NETD	80 mK at 30°C	<50 mK at 30°C
IR resolution	240 × 180 pixels	320 × 240 pixels
Zoom	1–2× continuous, digital zoom, including panning	1–4× continuous, digital zoom, including panning
Measurement		
Object temperature range	-20°C to +350°C in 2 ranges: -20°C to +120°C or 0°C to +350°C	-20°C to +650°C in 3 ranges: -20°C to +120°C or 0°C to +350°C or +200°C to +650°C
Measurement analysis		
Difference temperature	N/A	Delta temperature between measurement functions or reference temperature
Set-up		
Color palettes	General	General + RainHC, Bluered
Image annotations		
Image marker	On IR or visual image	4 on IR or visual image
Report generation		
Instant report	N/A	.pdf file in camera including thermal and visual image

#### Genera

General	
Imaging Performance	
Field of view (FOV) / Minimum focus distance	25° × 19° / 0.4 m
Spectral range	7.5 - 13 μm
Spatial resolution (IFOV)	1.82 mrad for T250 - 1.36 mrad for T335
Image frequency	9 Hz or 30 Hz
Focus	Automatic or manual
Focal Plane Array (FPA)	Uncooled microbolometer
Image presentation	
Image modes	General
Picture in Picture	Scalable IR area on visual image
Display	Built-in touch screen, 3.5" color LCD, 320 x 240 pixels
Image modes	IR image, Visual image, Picture in Picture, Thumbnail gallery
Measurement	
Accuracy	±2°C or ±2% of reading
Measurement analysis	
Spotmeter	5
Area	5 boxes with max./min./average
Isotherm	Detect high/low temperature/interval
Automatic hot / cold detection	Auto hot or cold spotmeter markers within area
Emissivity correction	Variable from 0.01 to 1.0 or selected from list of materials
Measurement corrections	Reflected temperature, optics transmission and atmospheric transmission
External optics/windows correction	Automatic, based on inputs of optics/window transmission and temperature

Setup	
Set-up controls	Local adaptation of units, language, date and time formats; automatic shutdown, display intensity
Image storage	
Туре	SD memory card
Format	Standard JPEG - including measurement data
Modes	IR/visual images, simultaneous storage of IR and visual images
Image annotations	
Text	Text from predefined list or soft keyboard on touch screen
Voice	60 seconds
MeterLink	Connect Extech Clamp Meter EX845 or Moisture Meter M0297 via Bluetooth
Sketch	From touch screen
Digital camera	
Built-in digital camera	3.1 Mpixel (2048 × 1536 pixels), and LED light
	3.1 Mpixel (2040 × 1330 pixels), and ELD light
Laser Pointer	
Laser	Semiconductor AlGaInP diode laser, Class 2
Laser alignment	Position is displayed automatically on the IR image
Video streaming	
Radiometric IR video streaming	Full dynamic to PC using USB
Non-radiometric IR video streaming	MPEG-4 to PC using USB
Power System	
Battery time	Rechargeable Lithium-ion battery, field replaceable
Battery operating time	4 hours
Charging system	In camera, AC adaptor, 2-bay charger or 12 V from a vehicle
Power management	Automatic shutdown (user selectable)
AC operation	AC adaptor, 90-260 V AC
Adaptor voltage	12 Volt VDC out
Environmental specifications	
Operating temperature range	-15 °C to +50 °C
Storage temperature range	-40 °C to +70 °C
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25 °C to +40 °C
Shock	25 g (IEC 60068-2-29)
Vibration	2 g (IEC 60068-2-6)
Encapsulation	Camera housing and lens: IP 54 (IEC 60529)
Interfaces	
USB-A	Connect external USB device (copy to memory stick)
USB Mini-B	Data transfer to and from PC/streaming
Composite video	PAL or NTSC
WiFi	Connects directly to Ipad/Iphone for image transfer or via local network
Physical characteristics	
Camera weight, incl. battery	0.88 kg
Camera size $(L \times W \times H)$	106 × 201 × 125 mm
Shipping size	180 x 500 x 360 mm
Shipping weight	5.6 kg

#### Standard package

FLIR T250 or FLIR T335: Hard transport case, Thermal imaging camera with lens, Battery, Battery charger, Bluetooth® USB micro adaptor, Calibration certificate, FLIR Tools™ PC software CD-ROM, Headset, Memory card with adaptor, Power supply incl. multi-plugs, Printed Getting Started Guide, Sunshield, USB cable, User documentation CD-ROM, Video cable, Warranty extension card or Registration card







# FLIRT400-Series

## Technical specifications

#### Camera specific





	FLIR T420	FLIR T440
Imaging performance		
Zoom	1–4× continuous, digital zoom, including panning	1–8× continuous, digital zoom, including panning
Measurement		
Object temperature range	-20°C to +650°C in 3 ranges: -20°C to +120°C or 0°C to +350°C +200°C to +650°C	-20°C to +1200°C in 3 ranges: -20°C to +120°C or 0°C to +350°C +200°C to +1200°C
Image presentation		
MSX	N/A	IR image with MSX
Image sketch	N/A	On IR and visual image
Measurement analysis		
Profile	N/A	1 live line
Measurement presets	N/A	Yes

General	
Imaging Performance	
Thermal sensitivity/NETD	<45 mK at 30°C
IR resolution	320 × 240 pixels
Field of view (FOV) / Minimum focus distance	25° × 19° / 0.4 m
Spectral range	7.5 - 13 µm
Spatial resolution (IFOV)	1.36 mrad
Image frequency	60 Hz
Focus	Automatic (one shot) or manual
Focal Plane Array (FPA)	Uncooled microbolometer
Image presentation	
Picture in Picture	Scalable IR area on visual image
Display	Built-in touch screen, 3.5" color LCD, 320 x 240 pixels
Image modes	IR image, visual image, thermal fusion, picture in picture, thumbnail gallery
Thermal fusion	IR image shown above, below or within temp interval on visual image
	Trimings oneway above, below or within temp interval on violar image
Measurement	
Accuracy	±2°C or ±2% of reading
Measurement analysis	
Difference temperature	Delta temperature between measurement functions or reference temperature
Spotmeter	5
Area	5 boxes with max./min./average
Isotherm	Detect high/low temperature/interval
Automatic hot / cold detection	Auto hot or cold spotmeter markers within area
Measurement function alarm	Audible/visual alarms (above/below) on any selected measurement function
Emissivity correction	Variable from 0.01 to 1.0 or selected from list of materials
Measurement corrections	Reflected temperature, optics transmission and atmospheric transmission
External optics/windows correction	Automatic, based on inputs of optics/window transmission and temperature
Setup	
Color palettes	Arctic, Gray, Iron, Lava, Rainbow and Rainbow HC
Set-up commands	User programmable button, local adaptation of units, language, date and time formats
Storage of images	
Image storage	Standard JPEG - including measurement data, on memory card
Image storage mode	IR/visual images, simultaneous storage of IR and visual images
Periodic image storage	7 seconds to 24 hours (IR)
	14 seconds to 24 hours (IR and visual)

Image annotations		
Voice	60 seconds (via Bluetooth)	
Text	Text from predefined list or soft keyboard on touch screen	
MeterLink	Connect Extech Clamp Meter EX845 or Moisture Meter M0297 via Bluetooth	
Sketch	From touch screen	
Report generation	- Instant Report (.pdf file) in camera including IR and visual images	
	- Separate PC software with extensive report generation	
Digital camera		
Built-in digital camera	3.1 Mpixel (2048 × 1536 pixels), and LED light	
Digital camera, FOV	Adapts to the IR lens	
Laser Pointer		
Laser	Semiconductor AlGaInP diode laser, Class 2, activated by dedicated button	
Laser alignment	Position is displayed automatically on the IR image	
·		
Video streaming	Maray	
Non-radiometric IR or visual video recording	MPEG4 to memory card	
Radiometric IR video streaming	Full dynamic to PC using USB	
Non-radiometric IR or visual video streaming	Uncompressed colorized video using USB	
Power System		
Battery time	Rechargeable Lithium-ion battery, field replaceable	
Battery operating time	4 hours	
Charging system	In camera, AC adaptor, 2-bay charger or 12 V from a vehicle	
Power management	Automatic shutdown and sleep mode (user selectable)	
Environmental specifications		
Operating temperature range	-15 °C to +50 °C	
Storage temperature range	-40 °C to +70 °C	
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25 °C to +40 °C / 2 cycles	
EMC	- ETSI EN 301 489-1 (radio)	
	- ETSI EN 301 489-17	
	- EN 61000-6-2 (Immunity)	
	- EN 61000-6-3 (Emission)	
	- FCC 47 CFR Part 15 B (Emission) - ICES-003	
Radio spectrum	ETSI EN 300 328	
nadio spectrum	FCC Part 15.247	
	RSS-210	
Bump	25 g (IEC 60068-2-29)	
Vibration	2 g (IEC 60068-2-6)	
Encapsulation	IP 54 (IEC 60529)	
Safety	EN/UL/CSA/PSE 60950-1	
Data communication interfaces		
Interfaces	USB-mini, USB-A, Bluetooth, Wi-Fi, composite video	
USB	USB-A: Connect external USB device (copy to memory stick)	
	USB Mini-B: Data transfer to and from PC/streaming	
Bluetooth	Communication with headset and external sensors	
Wi-Fi	Connects directly to smart phones or tablet PCs for image transfer or via local network	
Radio		
Wi-Fi	Standard: 802.11 b/g	
	Frequency range: 2412-2462 MHz	
	Max output power: 15 dBm	
Bluetooth	Frequency range: 2402-2480 MHz	
Physical characteristics		
Camera weight, incl. battery	0.88 kg	
Camera size (L × W × H)	106 × 201 × 125 mm	
Shipping size	180 x 500 x 360 mm	
Shipping weight	5.6 kg	
Tripod	UNC 1/4" - 20 (adapter needed)	
	·	

#### Standard package

FLIR T420 or T440: Hard transport case, Thermal imaging camera with lens, Battery, Battery charger, Bluetooth® USB micro adaptor, Calibration certificate, FLIR Tools™ PC software CD-ROM, Headset, Memory card with adaptor, Power supply incl. multi-plugs, Printed Getting Started Guide, Sunshield, USB cable, User documentation CD-ROM, Video cable, Warranty extension card or Registration card





# FLIRT600-Series

## Technical specifications

## Camera specific







	FLIR T600	FLIR T620	FLIR T640
Imaging performance			
Resolution	480x360 pixels	640x480 pixels	640x480 pixels
Spatial resolution	0.91 mrad for 25° lens	0.68 mrad for 25° lens	0.68 mrad for 25° lens
	0.55 mrad for 15° lens	0.41 mrad for 15° lens	0.41 mrad for 15° lens
	1.64 mrad for 45° lens	1.23 mrad for 45° lens	1.23 mrad for 45° lens
Thermal sensitivity (at 30 °C)	<40 mK @ 30 °C	<40 mK @ 30 °C	<35 mK @ 30 °C
Digital zoom	1-4x continuous, incl. panning	1-4x continuous, incl. panning	1-8x continuous, incl. panning
Focus	Automatic (one shot) or manual	Automatic (one shot) or manual	Continuous, one shot or manual
Image presentation			
MSX	N/A	N/A	IR image with MSX
Viewfinder	N/A	N/A	800x480 pixels
Image annotation			
Image sketch	N/A	N/A	On IR and visual image
Report generation			
Instant Report in camera	N/A	Automatic generation of PDF report based	Automatic generation of PDF report based
		on selected images direct in camera	on selected images direct in camera
Measurement			
Temperature range, standard	-40 °C to +150 °C	-40 °C to +150 °C	-40 °C to +150 °C
	+100 °C to +650 °C	+100 °C to +650 °C	+100 °C to +650 °C
			+300 °C to +2,000 °C
Temperature range, optional	+300 °C to +2,000 °C	+300 °C to +2,000 °C	
Measurement analysis			
Line profile function	N/A	N/A	Live profile, H/V-direction
Measurement presets	N/A	N/A	Yes
Geographic Information System			
Built-in GPS	N/A	Location data automatically added to every	Location data automatically added to every
		image for referencing on WEB maps	image for referencing on WEB maps

#### General

Imaging performance	
Field of View (FOV) / minimum focus distance	25° x 19° / 0.25 m
	15° x 11° / 0.5 m
	45° x 34° / 0.15 m
	lens needs to be specified when ordering
Focal Plane array (FPA)	Uncooled microbolometer
Spectral range	7.5 to 14 μm
Image frequency	30 Hz










Image presentation		
Display	4.3" superbright touchscreen LCD 800x480 pixels	
Image modes	4.3 Superoright touchscreen ELD BOOKEAND DIXERS IR-image with selected color scale, Full color visual, Picture in Picture (Resizable and movable IR-area), Thermal Fusion (Threshold above, below and interval), thumbnail gallery	
Manual image adjustments	Level/span/max/min	
Automatic image adjustments, continuous or manual	Standard or based on histogram from image content	
activation		
Automatic image adjustment with locked scale	Lock max, min or span	
Measurement		
Accuracy	± 2 °C or ± 2% of reading	
Measurement analysis		
Spotmeter	10	
Area	5 Max/Min/Average value within box or circle	
Automatic hot/cold detection	Max/Min temp. value and position shown within box, circle or on a line	
Isotherm Difference temperature	Detect high/low temperature/interval  Difference between any two measurement functions or any measurement function and a reference	
Reference temperature function	temperature Manually set	
Emissivity correction	Variable from 0.01 to 1.0 or selected from materials list	
Measurement corrections	Reflected temperature, optics transmission and atmospheric transmission	
External windows correction	Automatic based on inputs of window temperature and transmission	
Measurement function alarm	Audible/visual alarms (above/below) on any selected measurement function	
Set-up		
Image controls	Palettes (Arctic, Gray, Iron, Lava, Rainbow and Rainbow HC), image adjustment (auto/manual)	
Set-up controls	Local adaptation of units, language, date and time formats; automatic shutdown , display intensity	
Configure information to be shown in image	✓ ✓	
Programmable button	· · · · · · · · · · · · · · · · · · ·	
Image storage		
Type	IR/visual images; simultaneous storage of visual and IR images	
Format	Standard JPEG - including measurement data on SD memory card	
Digital camera		
Built-in digital camera	5 Mpixel incl. lamps	
Laser LocatIR		
Laser	Semiconductor AlGaInP diode laser, Class 2 - position is displayed on the IR image	
Laser alignment	Laser position shown on IR-image	
Image annotation		
Voice	60 seconds via Bluetooth®	
Text	Text from predefined list or soft keyboard on touch screen	
Sketch	A sketch drawn on touch screen is automatically saved with image	
Meterlink	Wireless connection to: Extech Moisture meter MO297 or Extech clamp meter EX845	
Video streaming /recording		
Radiometric IR video streaming	Full dynamic to PC using USB	
Non radiometric IR-video streaming Video recording in camera	MPEG 4 streaming to PC using USB  Non-radiometric IR video/visual video, MPEG4 to SD-card.	
WiFi	Wireless streaming of non-radiometric IR-video, MPEG4	
Update of camera	Wildiam Carachining of Hori Tadiomodile III Video, Wil 201	
Automatic update of camera to latest version	Automatic update of camera from PC running FLIR Tools	
	Automatic apatite of camera from 1 C rumning 1 Ent 10013	
Data communication interfaces Interfaces	USB-mini, USB-A, Bluetooth®, WiFi, DVI video	
USB	USB-A: Connect external USB device - USB-mini-B: Data transfer to and from PC / Streaming MPEG 4	
WiFi	Connects directly to Ipad/Iphone for image transfer or via local network	
Power		
Battery type	Lithium-lon (field replaceable)	
Battery operating time	> 2.5 hours at 25°	
Charging system	In camera, AC adaptor, 2-bay charger or 12 V from a vehicle	
Power management	Automatic shutdown and sleep mode (user selectable)	
AC operation	AC adaptor, 90-260 V AC, 50/60 Hz	
Adaptor voltage	12 Volt VDC out	
Environmental specifications	45 - 5000	
Operating temperature range	-15 to +50 °C	
Storage temperature range Humidity, operating and storage, non-condensing	-40 °C to +70 °C IEC 60068-2-30 /24 h, 95% relative humidity +25 °C to +40 °C	
Encapsulation	IP 54, IEC 60529	
Bump, Operational	25G, IEC 60068-2-29	
Vibration, Operational	2G, IEC 60068-2-6	
EMC, emission	EN 61000-6-3	
EMC, immunity	EN 61000-6-2	
Physical characteristics		
Camera weight incl. battery	1.3 kg	
Camera size (L x W x H)	143 x 195 x 95 mm	
Tripod Mounting	1/4" - 20	
Lenses optional		
Tele lens, 15°	15° x 11° / 0.9 m	
Wide angle lens 45°	45° x 34° / 0.1 m	

Standard package
FLIR T600 / T620 / T640: Hard transport case, thermal imaging camera with lens, Battery (2), Battery charger, Large eyecap, Tripod adaptor, Neck strap, Lens cap, Bluetooth® headset, Calibration certificate, FLIR Tools™ PC software CD-ROM, Memory card with adaptor, Power supply incl. multiplugs, Printed Getting Started Guide, Printed Important Information Guide, USB cable, User documentation CD-ROM, HDMI cable (2), Warranty extension card or Registration card

# FLIR P-series

## Technical specifications

## Camera specific







	FLIR P620	FLIR P640	FLIR P660
Imaging performance			
Field of View (FOV) / minimum focus	24° x 18° / 0.3 m	24° x 18° / 0.3 m	24° x 18° / 0.3 m
distance	45° x 34° / 0.2 m	12° x 9° / 1.2 m	12° x 9° / 1.2 m
	lens needs to be specified when ordering	45° x 34° / 0.2 m	45° x 34° / 0.2 m
		lens needs to be specified when	lens needs to be specified when
		ordering	ordering
Spatial resolution	0.65 mrad for 24° lens	0.65 mrad for 24°lens	0.65 mrad for 24°lens
	1.3 mrad for 45° lens	0.33 mrad for 12° lens	0.33 mrad for 12° lens
		1.3 mrad for 45° lens	1.3 mrad for 45° lens
Thermal sensitivity	40 mK at 30°C	30 mK at 30°C	30 mK at 30°C
Electronic zoom	1-2x continuous including pan function	1-8x continuous including pan function	1-8x continuous including pan function
Electric and manual focus	Auto and manual	Auto and manual	Auto (follows laser spot) and manual
with USM technology			
Image presentation			
Automatic contrast optimization	N/A	N/A	Adjustable DDE
Measurement			
Accuracy	$\pm$ 2 °C or $\pm$ 2% of reading	± 2 °C or ± 2% of reading	$\pm$ 1°C or $\pm$ 1% of reading (restricted
			range)
			± 2°C or ± 2% of reading
Measurement analysis			
Spotmeter	3	10	10
Area	3 boxes or circles	5 boxes or circles	5 boxes or circles
	with Max./Min./Average	with Max./Min./Average	with Max./Min./Average
Measurement function alarm	N/A	Audible/visual alarms (above/below) on	Audible/visual alarms (above/below) on
		any selected measurement function	any selected measurement function
Profile	N/A	1 live line, horizontal or vertical	1 live line, horizontal or vertical
Image storage			
In-camera storage	N/A	Built-in RAM for burst recording	Built-in RAM for burst recording
Laser pointer			
Laser alignment	N/A	N/A	Position is automatically
<b>C</b>			displayed on IR image
Laser mode	N/A	N/A	Auto-focus / level / spotmeter
Video recording			
Radiometric IR video recording	N/A	Real-time to built-in RAM,	Real-time to built-in RAM,
g	. 4	transferrable to memory card	transferrable to memory card
Non-radiometric video recording	N/A	MPEG-4 to memory card	MPEG-4 to memory card
Geographic Information System			
Built-in GPS	N/A	N/A	Location data automatically added to
	·		every image for referencing on WEB
			, ,
			maps







#### General

640 v 490 pivolo	
640 x 480 pixels	
7.5 - 13 μm	
30 Hz	
Automatic or manual	
Uncooled microbolometer	
Built-in Widescreen, 5.6" color LCD, 1024 x 600 pixels	
Built-in, tiltable LCD, 800 x 600 pixels	
Continuous/manual; linear or histogram based	
Level/span/max./min.	
IR image, Visual image, Thumbnail gallery, Thermal Fusion, Picture in Picture	
Shown together with live IR image	
IR image shown above, below or within temperature interval on the visual image (with 24° lens only	
Resizeable and moveable IR area on visual image (with 24° lens only)	
Hooledand and movedand in area on violati image (with 21 Tone only)	
-40°C to +500°C (optional up to +2000°C)	
2 with above/below interval	
Delta temperature between measurement functions or reference temperature	
Max/Min. temp. value and position shown within box, circle or on a line	
Manually set or captured from any measurement function	
Variable from 0.01 to 1.0 or selected from list of materials	
Reflected temperature, optics transmission, atmospheric transmission	
Automatic, based on inputs of optics/window transmission and temperature	
Local adaptation of units, language, date and time formats	
1 , 0 0 ,	
2	
SD memory card	
Standard JPEG - including measurement data	
IR/visual images, simultaneous storage of IR and visual images, visual image is automatically	
associated with corresponding IR image	
Every 10 seconds up to 24 hours	
For creating panorama images in FLIR Reporter Building software	
60 seconds via Bluetooth®	
Predefined text or free text from PDA (via IrDA) stored with the image	
4 on IR or visual image	
Possible to connect: Extech Moisture meter MO297 or Extech clamp meter EX845	
1 cools to common Excess motera moter moter of Excess cump moter Excess	
3.2 Mpixel auto-focus with video lamp	
3.2 IMPIXEL AUTO-LOCUS WITH VIOLED HAITIP	
Semiconductor AlGaInP diode laser, Class 2	
Rechargeable Lithium-ion battery, field replaceable	
3 hours	
In camera, AC adaptor, 2-bay charger or 12 V from a vehicle	
Automatic shutdown and sleep mode (user selectable)	
AC adaptor, 90-260 V AC, 50/60 Hz	
12 VDC out	
12 YDG OUL	
-15 °C to +50 °C	
-40 °C to +70 °C	
IEC 68-2-30/24 h 95% relative humidity +25 °C to +40 °C	
25 g (IEC 60068-2-29)	
2 g (IEC 60068-2-6)	
IP 54 (IEC 60529)	
Connect external USB device (copy to memory stick)	
Data transfer to and from PC / streaming MPEG-4	
PAL or NTSC	
For sending text comment files from PDA to camera, wireless transfer of text	
Optional	
Optional Yes	
Yes	
Yes Connects directly to Ipad/Iphone for image transfer or via local network	
Yes Connects directly to Ipad/Iphone for image transfer or via local network  1.8 kg	
Yes Connects directly to Ipad/Iphone for image transfer or via local network 1.8 kg 299 x 144 x 147 mm	
Yes Connects directly to Ipad/Iphone for image transfer or via local network  1.8 kg	

FLIR P620, FLIR P640 or FLIR P660: Hard transport case, Thermal imaging camera with lens, Battery (2 ea., one inserted in camera, one outside camera), Battery charger, Calibration certificate, FLIR Tools<sup>TM</sup> PC software CD-ROM, FireWire cable, 4/6 (FLIR P640 and P660 only), FireWire cable, 6/6 (FLIR P640 and P660 only), Bluetooth® headset, Bluetooth® USB micro adaptor, Lens cap (mounted on lens), Lens cap (2 ea.), Power supply incl. multi-plugs, Memory card-to-USB adaptor, Memory card with adaptor, Printed Getting Started Guide, Printed Important Information Guide, Shoulder strap, USB cable, User documentation CD-ROM, Video cable, Warranty extension card or Registration card

# FLIR IRW-series

## Technical specifications







## Product specific

Size Specifications	FLIR IR Windows 2" - IRW-2C	FLIR IR Windows 3" - IRW-3C	FLIR IR Windows 4" - IRW-4C
Overall Height	85.5mm	107.4mm	136.5mm
Overall Width	73mm	99mm	127mm
Overall Thickness	25.5mm	26.86mm	29.25mm
Required Actual Hole Diameter (Nominal)	60.3mm	88.9mm	114.3mm
Greenlee Punch	76BB	739BB	742BB
Recommended Max Panel Thickness	3.2mm	3.2mm	3.2mm
Optic Specifications			
Optic Diameter	50mm	<b>7</b> 5mm	95mm
Viewing Aperture Diameter	45mm	69mm	89mm
Viewing Aperture Area	1590mm²	3739mm²	6221mm <sup>2</sup>
Optic Maximum Temperature	1355.6°C	1355.6°C	1355.6°C
Ratings & Testing			
Maximum Pullout Strength	657 kg	1655 kg	1678 kg

#### General

<b>3</b> 01101 a1	
General Specifications	
NEMA Environment Type	Type 4/12 (outdoor/indoor)
Voltage Range	Any
Automatically Grounded	Yes
Maximum Operating Temperature	260°C
Body Material	Anodized Aluminum
Gasket Material	Silicone
Optic material	Calcium Fluoride
Hardware Material	Steel
Compatable with All FLIR Cameras	Yes
PIRma-Lock Installation System	Yes
Cover and Fastener Permanently Attached	Yes
Single-hole Installation	Yes
Thumb Screw and Safety Screw Included	Yes
Broadband IR Short-, Mid-, & Longwave	Yes
Visible Light Spectrum	Yes
Picture-in-Picture & Fusion Image Blending	Yes
Ratings & Testing	
UL Component Recognition (UL 50V)	Yes
UL 50 / NEMA Environment Rating	Type 4/12
Arc Flash Testing, IEC 62271-200 (KEMA)	5kV, 63kA for 30 Cycles at 60Hz
IP Rating, IEC 60529 (TUV)	IP67
Vibration Testing, IEC 60068-2-6 (TUV)	100 m/s^2 Vibration Withstand
Humidity Testing, IEC 60068-2-3 (TUV)	Extreme Humidity Withstand
Mechanical Testing, ANSI/IEEE C37.20.2 section A3.6 (TUV)	Impact and Load Resistant Cover
CSA Certification	Yes
Other	
Warranty	Limited Lifetime Warranty Against Manufacturer Defects



## FLIR i3 / i5 / i7

#### Accessories



#### Power



Car charger [T911025]

This cable is used to power the thermal imaging camera from the 12 V socket in a car.



Battery [T197410]

Extra battery that will allow you to spend extra time in the field doing inspections.

Power supply incl. Multi-plugs [T910711]



This power supply is used when powering the camera from the mains supply or to charge the batteries. It comes with different types of plugs.

#### Accessories



#### Hard transport case

[T197619]

Rugged, watertight plastic shipping case. Holds all items securely. The case can be locked with padlocks and features a breather valve to prevent pressure build-up in airplane cargo holds.



Pouch [T911085]

Soft pouch to protect the camera. Including shoulder strap.



**Tool belt** 

[T910933]

Tool belt for thermal imaging camera pouches.



#### Memory card micro-SD with adaptors

[T910737]

Capture images on the go with your camera. These small cards are easy to use and can hold a great amount of data.



USB cable Std-A <-> Mini-B

USB cable to connect the camera.

[1910423]

## **FLIR E-Series**



## Accessories

# O Prince of the Control of the Contr

#### Power



#### Cigarette lighter adaptor kit, 12 V DC, 1.2 m

[1910490]

Can be used to power the camera from the cigarette lighter socket in a car.



**Battery**High capacity battery for the IR camera.

[T197752]



**Battery charger** 

[T198125]

Stand-alone 2-bay battery charger, including power supply with multi plugs.



#### Power supply incl. Multi-plugs

[T910814]

This power supply is used when powering the camera from the mains supply or to charge the batteries. It comes with different types of plugs.

#### Storage



#### Memory card micro-SD with adaptors

[T910737]

Capture images on the go with your camera. These small cards are easy to use and can hold a great amount of data.

#### Miscellaneous



#### USB cable Std-A <-> Mini-B

[1910423]

USB cable to connect the camera.



#### Video cable

[1910582]

This cable can be used to transfer the images of the E-Series thermal imaging cameras to a monitor.



#### Tripod adapter

[T197926]

Tripod adapter, necessary to be able to mount the camera on a tripod.



#### Bluetooth headset

[T197771]

The Bluetooth headset can be used for annotation thermal images with voice messages. There is a wireless connection between the camera and the headset.



#### Pouch

[T911087]

Pouch, including shoulder strap, for FLIR Exx series.



#### Tool belt

[T911093]

Tool belt for thermal imaging camera pouches.



#### Hard transport case

[T197935]

Rugged, watertight plastic shipping case. Holds all items securely. The case can be locked with padlocks and features a breather valve to prevent pressure build-up in airplane cargo holds.



#### Sun shield

[T127100]

Snap-on sunshield to increase visibility of the LCD display.



#### **Extech Clamp meter EX845**

[T910972]

Can be connected to the thermal imaging camera through MeterLink™



#### **Extech Moisture meter MO297**

[T910973]

Can be connected to the thermal imaging camera through MeterLink™

#### Lenses



#### Lens 10 mm, 45° field of view incl. case

[1196960]

Sometimes there isn't enough room to step back and see the whole picture. This wide angle lens has a field of view almost double than the one of the standard 25° lens. Perfect for wide or tall targets such as electrical panels or paper machinery.



#### Lens 30 mm, 15° field of view, incl. case

[1196961]

When the target in question is a distance away it may be useful to use a telescope lens. The 15° lens is a popular lens accessory and provides almost 2X magnification compared to the 25° lens. Ideal for small or distant targets such as overhead power lines.

## FLIRT250 /T335



#### Accessories

#### Power



**Battery** [1196398]

Extra battery that will allow you to spend extra time in the field doing inspections.



2-bay battery charger, incl. power supply with multi-plugs

[T197650]

This 2 bay battery charger is used for charging FLIR Systems' camera batteries.



Cigarette lighter adaptor kit, 12 V DC, 1.2 m

[1910490]

Can be used to power the camera from the cigarette lighter socket in a car.



#### Power supply incl. Multi-plugs

[T910750]

Combined power supply, including multi plugs and battery charger to charge the battery when it is inside or outside of the camera.

**Battery package** 

[T197667]

A complete battery package consisting of three standard products: a battery, 2-bay battery charger including power supply with multi-plugs and a cigarette lighter adaptor kit.

#### Storage



#### Memory card micro-SD with adaptors

[T910737]

Capture images on the go with your camera. These small cards are easy to use and can hold a great amount of data.



#### Adaptor, SD memory card to USB

[1910475]

Allows to transfer the images from the SD card to a PC.

#### Miscellaneous



#### Hard transport case

[1196895]

Rugged, watertight plastic shipping case. Holds all items securely. The case can be locked with padlocks and features a breather valve to prevent pressure build-up in airplane cargo holds.



**Neck strap** 

[1124544]

Ties the camera around your neck so that it is protected against falling.



#### Pouch

[1124545]

Soft pouch to protect the camera.



#### Sun shield

[1123970]

Snap-on sunshield to increase visibility of the LCD display.



#### **Extech Clamp meter EX845**

[T910972]

Can be connected to the thermal imaging camera through MeterLink™



#### **Extech Moisture meter MO297**

[T910973]

Can be connected to the thermal imaging camera through MeterLink  $^{\!\scriptscriptstyle\mathsf{TM}}$ 

#### Lenses



**Lens cap**Lens cap for the camera

[1196818]



Lens 4 mm, 90° field of view, incl. case and mounting support

[T197412]

Sometimes there isn't enough room to step back and see the whole picture. This wide angle lens has a field of view almost four times the one of the standard 25° lens. This wide angle lens is perfect for wide or tall targets such as electrical panels or paper machinery.



Lens 10 mm, 45° field of view incl. case

[1196960]

Sometimes there isn't enough room to step back and see the whole picture. This wide angle lens has a field of view almost double than the one of the standard 25° lens. Perfect for wide or tall targets such as electrical panels or paper machinery.



Lens 30 mm, 15° field of view, incl. case

[1196961]

When the target in question is a distance away it may be useful to use a telescope lens. The 15° lens is a popular lens accessory and provides almost 2X magnification compared to the 25° lens. Ideal for small or distant targets such as overhead power lines.



Lens 76 mm, 6° field of view, incl. case and mounting support

T197408

For maximum magnification, the 6° lens is the only choice. This optic provides almost 3.5X magnification compared to the 25° lens and is ideally suited for inspection of overhead power lines. Due to the weight of this lens, a tripod is recommended.



Close-up lens 4x incl. case

[T197215]

The close-up lens provides a 4X magnification and is ideal for development purposes like looking at PCB's or small electronic components.



Close-up lens 2x incl. case

[T197214]

The close-up lens provides a 2X magnification and is ideal for development purposes like looking at PCB's or small electronic components.

#### Cables



Video cable

[1910582]

This cable can be used to transfer the images of the T/B-Series thermal imaging cameras to a monitor.



USB cable Std-A <-> Mini-B

[1910423

USB cable to connect the camera with a computer, using the USB protocol.

#### Extended measurement ranges

#### High temperature option to +1,200°C

[T197000]

Allow to measure temperatures of up to +1,200°C with the camera.

Headsets



Bluetooth® headset

[T197771]

Headset with Bluetooth® for wireless connection with the thermal imaging camera, including microphone.



Headset, 3.5 mm plug

[1910489]

This headset is used when annotating thermal images with voice messages. It features an adjustable microphone that can be on the right or on the left side of the headset. It connects to the headset connector on the camera.



Bluetooth USB micro adaptor

[T951235]

For wireless connection between the thermal imaging camera and external Bluetooth equipment and to transfer data from selected Extech instruments via MeterLink to the camera.



Wi-Fi USB adaptor

[T951387]

Wi-Fi USB adaptor for wireless connection between the thermal imaging camera and external equipment.

## FLIRT400-Series



#### Accessories

#### Power



Battery [1196398]

Extra battery that will allow you to spend extra time in the field doing inspections.

2-bay battery charger, incl. power supply with multi-plugs

[T197650]

This 2 bay battery charger is used for charging FLIR Systems' camera batteries.



Cigarette lighter adaptor kit, 12 V DC, 1.2 m

[1910490]

Can be used to power the camera from the cigarette lighter socket in a car.



#### Power supply incl. Multi-plugs

[T910750]

Combined power supply, including multi plugs and battery charger to charge the battery when it is inside or outside of the camera.

**Battery package** 

[T197667]

A complete battery package consisting of three standard products: a battery, 2-bay battery charger including power supply with multi-plugs and a cigarette lighter adaptor kit.

#### Storage



#### Memory card micro-SD with adaptors

[T910737]

Capture images on the go with your camera. These small cards are easy to use and can hold a great amount of data.



#### Adaptor, SD memory card to USB

[1910475]

Allows to transfer the images from the SD card to a PC.

#### Cables



Video cable

[1910582]

This cable can be used to transfer the images of the T/B-Series thermal imaging cameras to a monitor.



USB cable Std-A <-> Mini-B

[1910423]

USB cable to connect the camera with a computer, using the USB protocol.

#### Extended measurement ranges

#### High temperature option to +1,200°C

[T197000]

Allow to measure temperatures of up to +1,200°C with the camera.

#### Headsets



#### Bluetooth® headset

[T197771]

Headset with Bluetooth® for wireless connection with the thermal imaging camera, including microphone.

#### Lenses



**Lens cap**Lens cap for the camera

[1196818]



Lens 4 mm, 90° field of view, incl. case and mounting support

[T197412]

Sometimes there isn't enough room to step back and see the whole picture. This wide angle lens has a field of view almost four times the one of the standard 25° lens. This wide angle lens is perfect for wide or tall targets such as electrical panels or paper machinery.



Lens 10 mm, 45° field of view incl. case

[1196960]

Sometimes there isn't enough room to step back and see the whole picture. This wide angle lens has a field of view almost double than the one of the standard 25° lens. Perfect for wide or tall targets such as electrical panels or paper machinery.



Lens 30 mm, 15° field of view, incl. case

[1196961]

When the target in question is a distance away it may be useful to use a telescope lens. The 15° lens is a popular lens accessory and provides almost 2X magnification compared to the 25° lens. Ideal for small or distant targets such as overhead power lines.



Lens 76 mm, 6° field of view, incl. case and mounting support

T197408

For maximum magnification, the 6° lens is the only choice. This optic provides almost 3.5X magnification compared to the 25° lens and is ideally suited for inspection of overhead power lines. Due to the weight of this lens, a tripod is recommended.



Close-up lens 4x incl. case

[T197215]

The close-up lens provides a 4X magnification and is ideal for development purposes like looking at PCB's or small electronic components.



Close-up lens 2x incl. case

[T197214]

The close-up lens provides a 2X magnification and is ideal for development purposes like looking at PCB's or small electronic components.

#### Miscellaneous



Hard transport case

[1196895]

Rugged, watertight plastic shipping case. Holds all items securely. The case can be locked with padlocks and features a breather valve to prevent pressure build-up in airplane cargo holds.



**Neck strap** 

[1124544]

Ties the camera around your neck so that it is protected against falling.



Douch

[T911048]

Soft pouch to protect the camera. Possible to attach to tool belt.



Tool belt

[T911093]

Tool belt for thermal imaging camera pouches.



Sun shield

[1123970]

Snap-on sunshield to increase visibility of the LCD display.



**Extech Clamp meter EX845** 

[T910972]

Can be connected to the thermal imaging camera through MeterLink  $^{\!\top\!\!}$ 



Extech Moisture meter MO297

[T910973]

Can be connected to the thermal imaging camera through MeterLink™

## FLIRT600-Series

#### Accessories



#### Power



#### Cigarette lighter adaptor kit, 12 V DC, 1.2 m

[1910490]

Can be used to power the camera from the cigarette lighter socket in a car.



#### 2-bay battery charger, incl. power supply with multi-plugs

[T198126]

This 2-bay battery charger is used for charging FLIR Systems' camera batteries.



#### Battery

[T198055]

Extra battery that will allow you to spend extra time in the field doing inspections.



#### Power supply incl. Multi-plugs

[T910814]

This power supply is used when powering the camera from the mains supply or to charge the batteries. It comes with different types of plugs.

#### Storage



#### Memory card micro-SD with adaptors

[T910737]

Capture images on the go with your camera. These small cards are easy to use and can hold a great amount of data.

#### Cables



#### USB cable Std-A <-> Mini-B

[1910423]

USB cable to connect the camera with a computer, using the USB protocol.



#### HDMI to DVI cable, 1.5 m

[T910930]

Can be used to show the high resolution images of the camera on a screen with



#### HDMI to HDMI cable, 1.5 m

[T010001

Can be used to show the high resolution images of the camera on a screen with HDMI input.

#### Headsets



#### Bluetooth® headset

[T197771

Headset with Bluetooth® for wireless connection with the thermal imaging camera, including microphone.

#### Extended measurement ranges

#### High temperature option +300°C up to +2,000°C

[T197896]

Allow to measure temperatures of up to +2,000°C with the camera.

#### Lenses



#### Lens 88.9 mm, 7° field of view incl. case

[T198166]

The 7° lens is a popular lens accessory and provides 3.6x magnification compared to the standard lens. Ideal for small or distant targets



#### Lens 41.3 mm, 15° field of view incl. case

[T197914]

The 15° lens is a popular lens accessory and provides 1.7x magnification compared to the standard lens. Ideal for small or distant targets such as overhead power lines.



#### Lens 24.6 mm, 25° field of view incl. case

[T197922]

The standard 25° lens is suitable for the majority of applications.



#### Lens 13.1 mm, 45° field of view incl. case

[T197915]

This wide angle lens has a field of view almost double that of the standard 25° lens. Perfect for wide or tall targets or when working in confined areas.



#### Lens 6.5 mm, 80° field of view incl. case

[T198065]

This wide angle lens has a field of view of more than 3 times that of the standard lens. Ideal for shooting images of large objects from a short distance.



#### Close-up lens 32 mm (fits 25° lens) incl. case

[T198059]

The 32 mm lens provides a 2.9X magnification and is ideal for development purposes like looking at PCB's or small electronic components. Can only be mounted on 25° lens.



#### Close-up lens 64 mm (fits 25° lens) incl. case

[T198060]

The 64 mm lens provides a 5.8X magnification and is ideal for development purposes like looking at PCB's or small electronic components. Can only be mounted on 25° lens.

#### Miscellaneous



#### Hard transport case

[T197924]

Rugged, watertight plastic shipping case. Holds all items securely. The case can be locked with padlocks and features a breather valve to prevent pressure build-up in airplane cargo holds.



**Pouch** 

[T911048]

Soft pouch to protect the camera. Possible to attach to tool belt.



Tool belt

[T911093]

Tool belt for thermal imaging camera pouches.



Tripod adapter

[T197731]

Tripod adapter, necessary to be able to mount the camera on a tripod.



Neck strap

[1124544]


Ties the camera around your neck so that it is protected against falling.



.....

Large evecap

[T197883]



[T197753]



Extech Clamp meter EX845

Can be mounted on the viewfinder.

[T910972]

Can be connected to the thermal imaging camera through MeterLink™



#### **Extech Moisture meter MO297**

[T910973]

Can be connected to the thermal imaging camera through MeterLink™

## FLIR P-Series



#### Accessories

#### Power



[1196209

High capacity battery that will allow you to spend extra time in the field doing inspections.



Battery charger [T197692]

This 2 bay battery charger is used for charging FLIR Systems' camera batteries.



Cigarette lighter adaptor kit, 12 V DC, 1.2 m

[1910490]

Can be used to power the camera from the cigarette lighter socket in a car.



#### Power supply incl. Multi-plugs

[T910814]

This power supply is used when powering the camera from the mains supply or to charge the batteries. It comes with different types of plugs.

#### Storage



Adaptor, SD memory card to USB

[1910475]

Allows to transfer the images from the SD card to a PC.



#### Memory card micro-SD with adaptors

[T910737]

Capture images on the go with your camera. These small cards are easy to use and can hold great amount of data.

#### Extended measurement ranges

High temperature option to +1,500°C

[1196744]

Allow to measure temperatures of up to +1,500°C with the camera.

High temperature option to +2,000°C

[1196745]

Allow to measure temperatures of up to +2,000°C with the camera.

#### Miscellaneous



#### Hard transport case

[T197262]

Rugged, watertight plastic shipping case. Holds all items securely. The case can be locked with padlocks and features a breather valve to prevent pressure build-up in airplane cargo holds.

#### Option for IR-video streaming

[T197921]

Radiometric IR-video streaming using FireWire



#### Bluetooth® headset

[T197771]

Headset with Bluetooth® for wireless connection with the thermal imaging camera, including microphone.



#### Headset, 3.5 mm plug

[1910489]

This headset is used when annotating thermal images with voice messages. It features an adjustable microphone that can be on the right or on the left side of the headset. It connects to the headset connector on the camera.



#### Remote control unit

[T197230]

Can be used to control the camera safely from a remote distance. Extremely useful when the camera needs to look at dangerous processes.



#### Bluetooth USB micro adaptor

[T951235]

For wireless connection between the thermal imaging camera and external Bluetooth equipment and to transfer data from selected Extech instruments via MeterLink to the camera.



#### Wi-Fi USB adaptor

T951387

Wi-Fi USB adaptor for wireless connection between the thermal imaging camera and external equipment.



#### **Extech Clamp meter EX845**

T910972

Can be connected to the thermal imaging camera through MeterLink™



#### **Extech Moisture meter MO297**

[T910973]

Can be connected to the thermal imaging camera through MeterLink™

#### Lenses



#### Lens 19 mm, 45° field of view, incl. case

[T197189]

Sometimes there isn't enough room to step back and see the whole picture. This wide angle lens has a field of view almost double than the one of the standard 24° lens. Perfect for wide or tall targets such as electrical panels or paper machinery.



#### Lens 38 mm, 24° field of view, incl. case

[T197187]

The 24° lens can be used for daily inspections. Suitable for the majority of applications.



#### Lens 76 mm, 12° field of view, incl. case

[T197188]

When the target in question is a distance away it may be useful to use a telescope lens. The 12° lens is a popular lens accessory and provides 2X magnification compared to the 24° lens. Ideal for small or distant targets such as overhead power lines.



#### Lens 131 mm, 7° field of view, incl. case

[T197190]

For maximum magnification, the 7° lens is the only choice. This optic provides almost 3.5X magnification compared to the 24° lens and is ideally suited for inspection of overhead power lines. Due to the weight of this lens, a tripod is recommended.



#### Protective window (fits 24° lens), incl. case

[T197343]

A protective plastic window: suitable when the camera is used in a dusty environment or when there is a risk of liquids splashing on the lens. The window is made of monocrystalline fluoride.



#### Close-up lens 75 mm field of view (fits 24° lens), incl. case

[1196683]

This close-up optics attaches to the standard 24 lens and is ideal for looking at very small objects.



#### Macro lens 16 mm field of view, incl. case

[T197341]

For R&D usage or development purposes. For example looking at PCB's or small electronic components.

#### Cables



#### FireWire cable 4/6, 2 m

[1910483]

This cable is used to connect a thermal imaging camera to a computer using the FireWire protocol.



#### FireWire cable 6/6, 2 m

[1910482]

This cable is used to connect a thermal imaging camera to a computer using the FireWire protocol.



### USB cable Std-A <-> Mini-B, 1.8 m

[1910423]

Can be used to transfer images from the camera to a computer using the USB protocol.



#### Video Cable RCA to RCA

[1910484]

This cable can be used to transfer the images of the P-Series thermal imaging cameras to a monitor.

# **FLIR Systems**

News





# Thermal imaging guidebook for industrial applications

Thermal imaging cameras are being used for a wide variety of industrial applications. Numerous industries worldwide have discovered the advantage of incorporating thermal imaging cameras in their industrial processes and programs.

This booklet is an in-depth guide for these industrial applications. Not only does it give a comprehensive overview of a large number of applications, it also explains how to do thermal inspections in an efficient way, what you should pay attention to when buying a thermal imaging camera and much more.

These details and many other key thermal imaging aspects are all covered in this 46-page hard-copy guide.

You can order a free hard-copy of the guide on our website: www.flir.com

## Application stories

FLIR Systems regularly publishes application stories in which customers are explaining what they are doing with a FLIR thermal imaging camera and how it helps them to save time and money. All application stories can be downloaded from our website: **www.flir.com** 



# **FLIR Systems**

Online



Up-to-date information
Application stories
Technical notes
Informative videos



Visit our website www.flir.com

